

SINGLE PHASE ON/OFF-GRID SOLAR INVERTER

单相并、离网逆变器

INV 3600-24



Built-in 100A Solar Charger
光伏充电100A



LCD Display
液晶显示



MAX.PV 5KW
最大光伏功率5KW



BMS Support Lithium/Lead-acid Battery
支持锂电或铅酸电池



Workable with Generator
支持发电机



WiFi Monitoring
支持wifi监控




Wide MPPT Range 120-500V
光伏工作电压范围120-500V



Lithium Battery Activation
支持锂电池激活

系统图 System Diagram

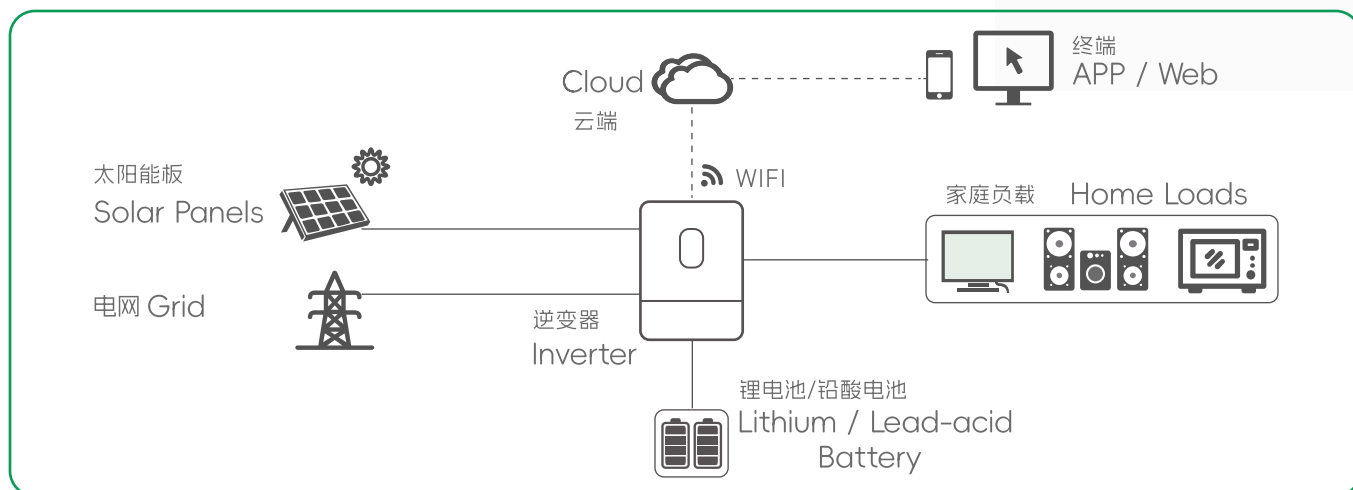

规格参数Specifications Parameter

型号Model	INV 3600-24
交流输入 AC Input	
额定输入电压 Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
电压范围 Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
频率 Frequency (Hz)	50 / 60 (自适应 Auto Adaptive)
交流输出 AC Output	
额定功率 Rated Capacity (kW)	3.6
峰值功率 Surge Power (kVA)	5.7
电压 Voltage (VAC)	208 / 220 / 230 / 240
功率因数 Power Factor (PF)	1
频率 Frequency	50/60Hz±0.1%
切换时间 Switch Time (ms)	10
正弦波 Wave Form	正弦波 Pure Sine Wave
过载容量 (电池模式) Overload Capacity (Battery Mode)	60s@102%~110% ; 10s@110%~130%; 3s@130%~150% ; 0.2s@>150%;
最大效率 Max. Efficiency (Battery Mode)	92.7%@24VDC
充电 Charger (PV / AC)	
太阳能充电类型 Solar Charger Type	MPPT
光伏输入 Max PV input current / power	18A / 5000W
电压范围 Operating Voltage Range (VDC)	40~450
开路电压Max PV Open Circuit Voltage (VDC)	500
光伏充电电流Max PV Charge Current (A)	100
市电充电电流Max AC Charge Current (A)	100
最大充电电流Max. Charge Current (PV + AC) (A)	100
电池 Battery	
标称电压 Normal Voltage (VDC)	24
浮充电压 Floating Charge Voltage (VDC)	27
过充保护电压 Overcharge Protection (VDC)	29.2
电池类型 Battery Type	Lithium and Lead-acid
界面 Interface	
显示 reveal	LCD
通讯 communication	RS485 / RS232 / USB
监控 Monitoring	WiFi (Optional)
一般信息 General Data	
防护等级 Ingress Protection	IP21
工作温度 Operating Temperature	-10 °C ~ 50 °C
相对湿度 Relative Humidity	5% ~ 95% (Non-condensing)
存储温度 Storage Temperature	-15 °C ~ 60 °C
净重/毛重 (NW/GW)Kg	6.3/7.3
产品尺寸 Products Size(W*H*D)mm	289x420x100mm
包装尺寸 Package Size(W*H*D)mm	369x500x160mm
最大工作海拔 Max. Operating Altitude	4000m(Derating above 1000m)